


Corrente de Rolo Norma ANSI (ASA)

AÇO Inoxidável 304

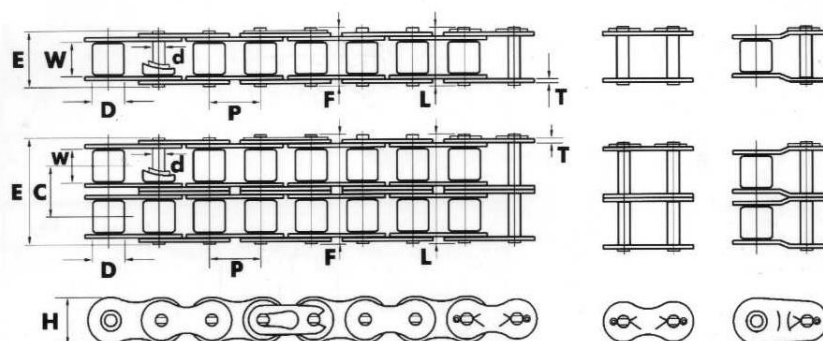

Referência ISO e ABNT ANSI	Passo P	Largura entre Placas W	Diâmetro do Rolo D	PINO				Passo Trans- versal C	PLACA		Carga de Ruptura kgf	Carga de Trabalho máx. kgf	Peso aproxi- mado kg/m
				Diâme- tro d	Compri- mento E	Compri- mento F	Compri- mento L		Espes- sura T	Altura H			
06C-1 35-1	9,525	4,77	5,08	3,58	12,40	13,17	-----	-----	1,30	9,00	600	90	0,33
08A-1 40-1 08A-2 40-2	12,70	7,95	7,95	3,96	16,60 31,00	17,80 32,20	-----	14,38	1,50	12,00	1054 2108	190 323	0,63 1,14
10A-1 50-1 10A-2 50-2	15,875	9,53	10,16	5,09	20,70 38,90	22,20 40,40	-----	18,10	2,03	15,09	1670 3340	315 536	1,03 2,02
12A-1 60-1 12A-2 60-2	19,05	12,7	11,91	5,94	25,90 48,80	27,70 50,50	28,40 50,90	22,80	2,42	18,00	2380 4760	429 729	1,50 2,94
16A-1 80-1 16A-2 80-2	25,40	15,88	15,88	7,92	32,70 62,70	35,00 64,30	35,30 64,70	29,30	3,25	24,00	4270 5940	769 1308	2,62 5,17
20A-1 100-1	31,75	19,05	19,05	9,53	40,40	-----	44,70	-----	4,00	30,00	6586	1145	3,94