


Corrente de Rolo com Pino Saliente Unilateral

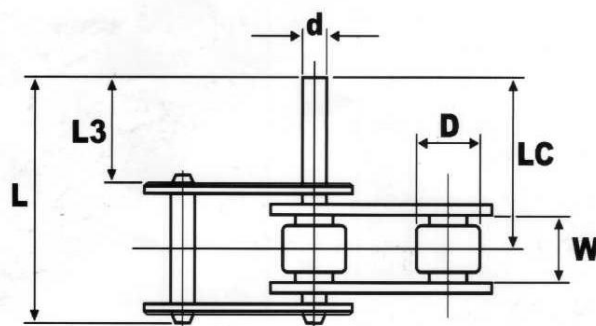

Referência		P	W	D	d	L3	L	Lc
ISO	ANSI							
08A-1	40-1	12,70	7,95	7,95	3,96	15,70	31,00	22,70
10A-1	50-1	15,88	9,53	10,16	5,09	19,70	38,90	28,55
12A-1	60-1	19,05	12,70	11,91	5,94	24,65	48,80	35,80
16A-1	80-1	25,40	15,88	15,88	7,92	31,90	62,70	46,30
20A-1	100-1	31,75	19,05	19,05	9,53	38,70	76,40	56,25
24A-1	120-1	38,10	25,40	22,23	11,10	48,90	96,40	71,30

Nota:

Mediante prévia consulta fabricamos correntes com pinos salientes especiais.